


APV13

Floor drain 150×150/110 mm straight outlet, stainless steel grid, collar-2nd level insulation, wet odour trap

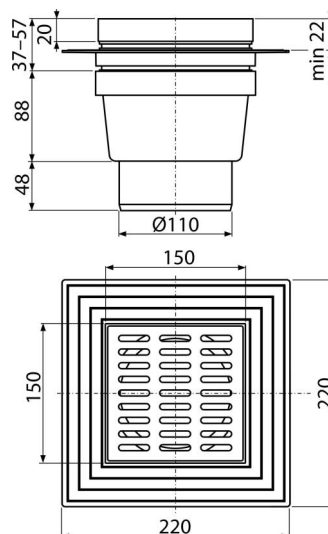

Application

For wheelchair access
For drainage of floor level showers
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

Features

- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Stainless steel grid 145×145×5 mm
- Straight connection to waste Ø110 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 37-57 mm
- High capacity drain

Scope of supply

- Floor drain throat 150×150 mm
- Collar 2nd level of insulation inner Ø150 mm
- Stainless steel grid
- Seal kit
- Drain body Ø110 mm, straight outlet
- Wet odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV13	8594045937176	0,85 6,77 155,4 kg	230×190×230 780×245×475 mm	8 160 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 158-195 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 110 mm
- Flow of the inlet grid 88,8 l/min
- Wet odour trap 51 mm