


APV32

Floor drain 105×105/50 mm straight outlet, stainless steel grid, combined odour trap SMART

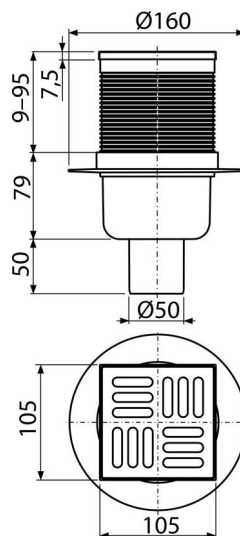

Application

- For wheelchair access
- For drainage of floor level showers
- For the interior, where it is not expected to regularly use the drain (laundry, boiler rooms, cellars)

Features

- Side connection to waste Ø50 mm
- Insulation collar for connection to waterproofing of the building
- Combined odour trap SMART
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Material: stainless steel AISI 304, DIN 1.4301
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Water column and mechanical flap effectively prevent the penetration of odours from the sewer
- Height adjustable throat 9-95 mm

Scope of supply

- Design stainless steel grid
- Floor drain throat 105×105 mm
- Combined odour trap SMART
- Seal kit
- Drain body Ø50 mm, straight outlet

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV32	8595580503475	0,46 9,13 166,1 kg	160×160×138 590×430×390 mm	20 320 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 138-224 mm
- Waste pipe diameter 50 mm
- Flow of the inlet grid 37 l/min
- Load class K3 300 kg
- Odour trap 30 mm