


A506KM

Shower waste and trap CLICK/CLACK, metal

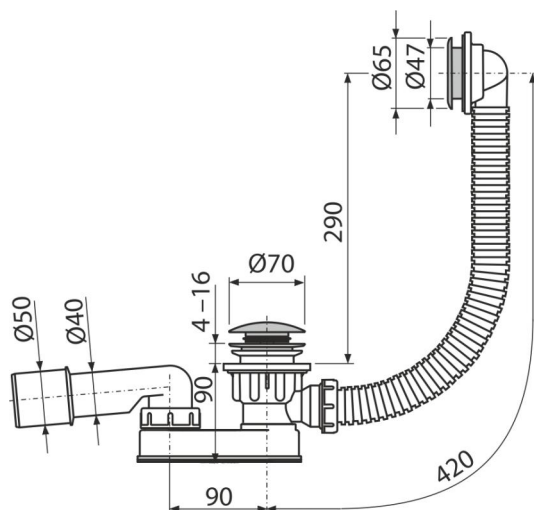

Application

To drain the water from the deep shower tray
For shower trays with overflow
For bathtubs with drain outlet DN52

Features

- Overflow flexi pipe
- Easy clean trap – thanks to completely removable waste outlet
- Reduced installation height
- Closing waste by CLICK/CLACK
- Shower waste and overflow system
- Wet odour trap with swivel elbow

Scope of supply

- Waste outlet wrench 6/4"
- Assembly kit
- Chrome-plated metal plug
- Chrome-plated brass outlet grid
- Chrome-plated plastic overflow grid
- Waste and trap body with overflow
- Odour trap of polypropylene, thermally and chemically resistant

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A506KM	8595580503604	0,53 13,18 230,8 kg	370×100×200 590×430×390 mm	25 400 pcs

Warranty

2/3 years *

Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 42 l/min
- Thermal resistance 98 °C