

APZ104-550 Flexible Low

Shower drain with an edge for perforated grids and adjustable vertical flange to the wall

Application


For wheelchair access
For sites with limited floor height
For drainage of floor-level showers
For installation directly to the wall
For perforated stainless steel grids
For indoor use

Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Shower drain material: stainless steel 2 mm, AISI 304, DIN 1.4301
- Mechanically cleanable trap up to the waste pipe
- Adjustable vertical insulating collar for tiles with a thickness of 6–12 mm
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Trap firmly connected to the drain – 100% waterproofing
- Installation height from 55 mm
- Facilitates the inclination of the floor
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

Scope of supply

- Anchoring set: screw Ø6x50 – 2 pcs, dowel Ø10 – 2 pcs, screw Ø4.2x38 – 3 pcs, dowel Ø8 – 3 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

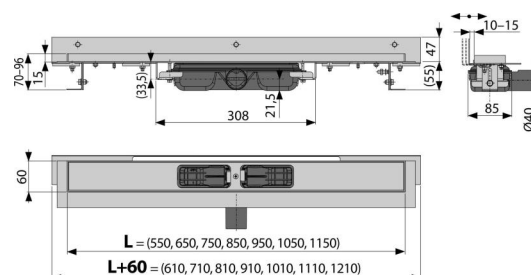

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ104-550	8595580505875	550 mm 3,33 26,62 99,9 kg	620x160x205 mm	8 24 pcs

Warranty

2/25 years *

Technical specifications

- Total installation height 70-96 mm
- Minimum thickness of concrete 55 mm
- Resistance of odour trap against the pressure 575 Pa
- Waste pipe diameter 40 mm
- Movable flange range 10-15 mm
- Flow rate 35 l/min
- Load class K3 300 kg
- Odour trap 28 mm