

APV26C

Floor drain 105×105/50 mm side outlet, stainless steel grid, collar-2nd level insulation, dry odour trap

Application


- For wheelchair access
- For drainage of floor level showers
- For outdoor spaces where there may be a drop in temperature below freezing

Features

- Side connection to waste Ø50 mm
- Insulation collar for connection to waterproofing of the building
- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanical closure of dry odour trap prevents the penetration of odours from the sewer
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Reduced installation height
- Dry odour trap
- Height adjustable throat 24–47 mm

Scope of supply

- Floor drain throat 105×105 mm
- Collar-2nd level of insulation inner Ø105 mm
- Stainless steel grid
- Seal kit
- Dry odour trap
- Floor drain body Ø50 mm, side outlet

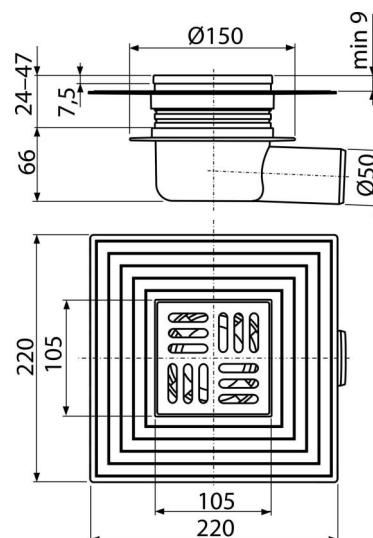

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV26C	8595580507008	0,60 4,83 116,7 kg	230×190×230 780×245×475 mm	8 160 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 90-113 mm
- Resistance of odour trap against the pressure 260 Pa
- Waste pipe diameter 50 mm
- Flow of the inlet grid 62 l/min
- Load class K3 300 kg