

# APV2324

**Floor drain 105×105/50/75 mm straight outlet, stainless steel grid, stainless steel flange and collar-2nd level insulation, combined odour trap SMART**

## Application



For wheelchair access  
For drainage of floor level showers  
For the interior, where it is not expected to regularly use the drain (laundry, boiler rooms, cellars)

## Features

- Combined odour trap SMART
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Stainless steel collar for firm attachment of waterproofing membrane or building waterproofing fabric
- Direct connection to waste Ø50/75 mm
- Wide insulation collar for connection to waterproofing construction
- Water column and mechanical flap effectively prevent the penetration of odours from the sewer
- Height adjustable throat 25–95 mm

## Scope of supply

- Floor drain throat 105×105 mm
- Combined odour trap SMART
- Collar-2nd level of insulation inner Ø105 mm
- Stainless steel grid
- Stainless steel flange + assembly set
- Seal kit
- Drain body Ø50/75 mm, straight outlet

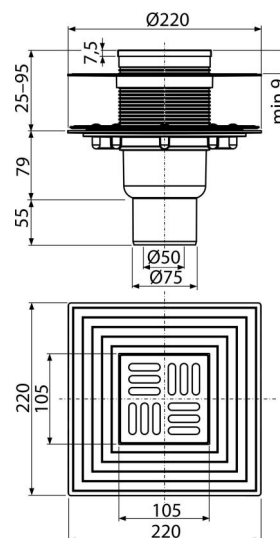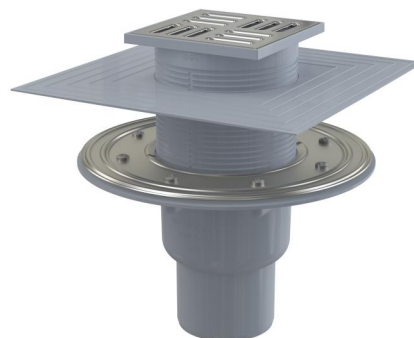

## Order number, Logistic information

| Code    | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|---------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APV2324 | 8595580518509 | 1,14   9,14   202,9 kg               | 230×190×230   780×245×475 mm    | 8   160 pcs                    |

## Warranty

2/6 years \*

## Norms

EN 1253

## Technical specifications

- Total installation height 159-229 mm
- Waste pipe diameter 75/50 mm
- Flow of the inlet grid 37 l/min
- Load class K3 300 kg
- Odour trap 30 mm