


# APV6411

Floor drain 150×150/50 mm straight outlet, stainless steel grid, wet odour trap

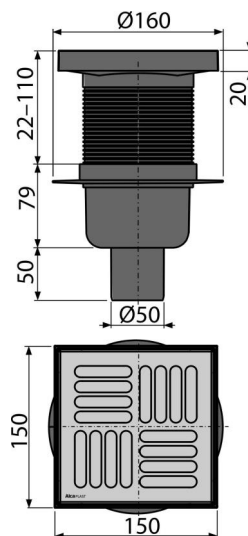

## Application

For wheelchair access  
For draining a single shower at floor level  
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

## Features

- Insulation collar for connection to waterproofing of the building
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 143×143×5 mm
- Straight connection to waste Ø50 mm
- Wet odour trap
- Height adjustable throat 22–110 mm

## Scope of supply

- Floor drain throat 150×150 mm
- Stainless steel grid
- Seal kit
- Drain body Ø50 mm, straight outlet
- Wet odour trap

## Order number, Logistic information

| Code    | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|---------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APV6411 | 8595580520779 | 0,65   9,76   176,2 kg               | 300×160×170   590×430×390 mm    | 15   240 pcs                   |

## Warranty

2/6 years \*

## Norms

EN 1253

## Technical specifications

- Total installation height 151-239 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 50 mm
- Flow of the inlet grid 46 l/min
- Wet odour trap 51 mm