


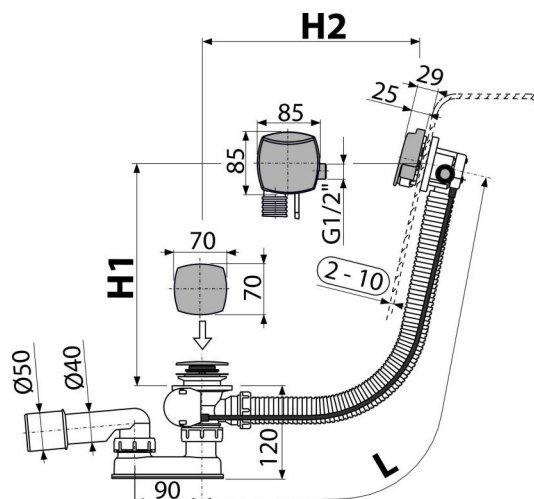

- Otpornost na tlak zapora mirisa 588 Pa
- Protok 48,6 l/min
- Protok preljeva 33,6 l/min
- Toplinski certifikat 95 IP
- zapor za mirise 50 mm