# APZ8-750M Simple

**Plastic linear shower drain, with an edge and perforated grid, length 750 mm**

## Application

For indoor use
For drainage of floor-level showers
For installation into open spaces or near the wall of the shower area
For wheelchair access

## Features

- They are made of highly durable plastic that resists frost and chemistry
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals
- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Mechanically cleanable trap up to the waste pipe
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage

## Scope of supply

- Linear shower drain
- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Self-adhesive waterproofing tape
- Dismantling hook
- Stainless steel perforated grid Simple 9 in matt with a protective film
- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Combined odour trap SMART
- Height adjustable feet 4 pcs

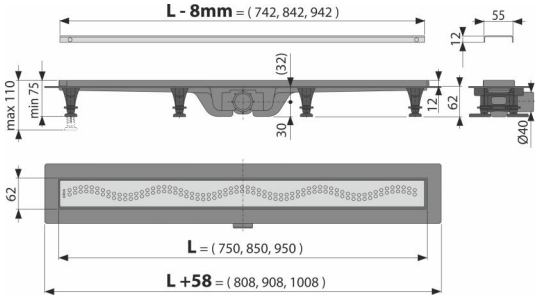


## Order number, Logistic information

| Code | EAN | Weight (piece \| packing \| palett) | Dimensions (piece \| packing) | Quantity (packing \| palett) |
|---|---|---|---|---|
| APZ8-750M | 8595580537395 | 1,82 \| 54,62 \| 183,9 kg | 865×80×155 \| 885×785×415 mm | 30 \| 90 pcs |

## Norms

EN 1253

## Technical specifications

- Odor trap combined with a water seal 29 mm
- Flow of the inlet grid 28 l/min
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Minimum thickness of concrete 62 mm
- Total installation height 75-110 mm
- Load class K3 300 kg



© 2026 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com