


AKS7

Trap for dripping condensate, concealed, stainless steel DN40 and DN50

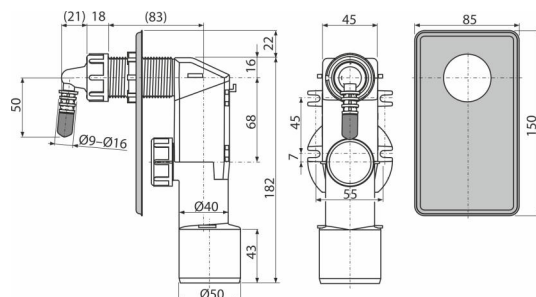

Application

For installation under plaster
To capture the dripping condensation

Features

- Hooks for a firmer fixing on the wall
- Installation stoppers to connect HT50
- Combined odour trap with a ball
- Material: polypropylene
- Hose connection Ø17 and Ø23 mm
- Connection to HT 40/50
- Service access for easy cleaning

Scope of supply

- Elbow
- Stainless steel cover
- Waste and trap body with a combined odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AKS7	8595580549473	0,23 5,78 112,5 kg	180×150×70 590×390×430 mm	25 400 pcs

Warranty
2/2 years *

Norms
EN 274

Technical specifications

- Flow rate 16,8 l/min
- Odour trap 44 mm