APZ101-1450

Stainless steel linear shower drain, with an edge, for perforated grid, length 1450 mm

Application

For indoor use
For drainage of floor-level showers
For installation into open spaces or near the wall of the shower area
For perforated stainless steel grids
For wheelchair access
For sites with limited floor height

Features

- Stainless steel shower drain (perfectly smooth and durable surface thanks to special surface treatment)
- Installation height from 55 mm
- Adjustable height
- Trap firmly connected to the drain – 100% waterproofing
- Self-adhesive tape for quality waterproofing
- Mechanically cleanable trap up to the waste pipe
- The collar and trap are protected by film, the channel itself by a polystyrene insert
- The high flow rate is achieved due to the double compartment trap system
- Material of shower drain: stainless steel 2 mm, AISI 304, DIN 1.4301, EN1253-1
- Trap material: polypropylene

Scope of supply

- The shower drain is assembled with the odour trap
- Anchoring set: screw Ø6×50 – 4 pcs, dowel Ø10 – 4 pcs
- Self-adhesive waterproofing tape
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Installation trough cover - polystyrene

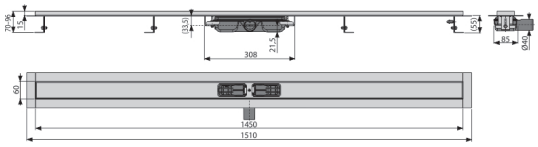

Order number, Logistic information

Code	EAN		Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
APZ101-1450	8595580550844	1450 mm	5,85 | 5,85 | - kg	1520×170×135 | 1520×170×135 mm	1 | - pc

Norms

EN 1253

Technical specifications

- Odour trap 28 mm
- Flow rate 35 l/min
- Resistance of odour trap against the pressure 575 Pa
- Waste outlet diameter 40 mm
- Minimum thickness of concrete 55 mm
- Total installation height 70-96 mm
- Load class K3 300 kg

© 2026 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com