

APZ22-950 Optimal

Shower drain with a stainless steel edge for perforated grids or tile embedding

Application


- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For full grid SOLID
- For indoor use
- For grid TILE for embedding tiles

Features

- Secure connection to the construction waterproofing system
- Combined odour trap provides protection against odour from the sewage even after the water dries out from the waste
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic shower drain with stainless steel edge, which is tightly fixed around the circuit
- Self-adhesive tape for quality waterproofing
- Installation height from 85 mm
- Adjustable plastic anchor legs 0–27 mm allowing fast and convenient installation, including the precise setting of the required level
- The high flow rate is achieved due to the double compartment trap system
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Combined odour trap with an integrated seal
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

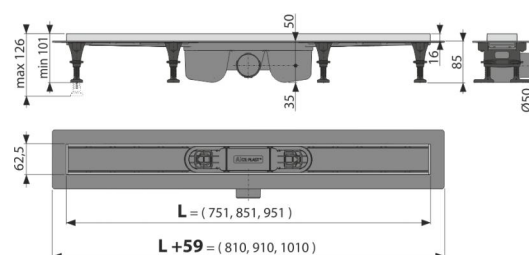

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ22-950	8595580554644	1,89 22,65 88,0 kg	1020×125×150 825×375×1030 mm	12 36 pcs
Warranty 2/6 years *	Norms EN 1253			

Technical specifications

- Total installation height 100-127 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 50 mm
- Flow of the inlet grid 63 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 50 mm