

APZ2022-850 Optimal

Shower drain with a stainless steel edge for perforated grids or tile embedding, without odour trap

Application


- For wheelchair access
- For connection to the central trap
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For full grid SOLID
- For indoor use
- For grid TILE for embedding tiles

Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Plastic shower drain with stainless steel edge, which is tightly fixed around the circuit
- Self-adhesive tape for quality waterproofing
- Installation height from 70 mm
- Adjustable plastic anchor legs 0–27 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

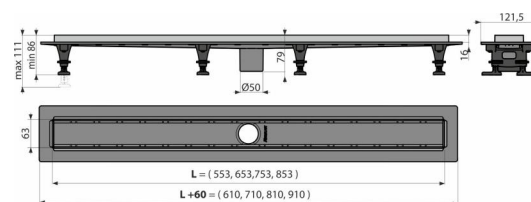

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ2022-850	8595580559540	1,55 18,59 75,8 kg	920×143×106 930×825×375 mm	14 42 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 85–110 mm
- Minimum thickness of concrete 78 mm
- Waste outlet diameter 50 mm
- Flow of the inlet grid >80 l/min
- Load class K3 300 kg