


A516CKM-100

Bath CLICK/CLACK waste and trap with flat overflow, chrome

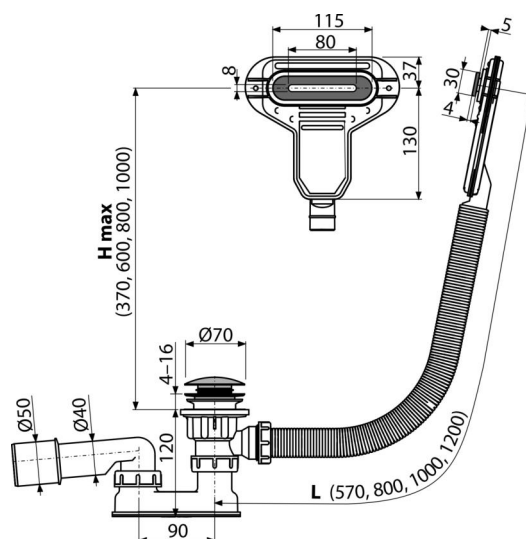

Application

To drain the water from the bath to the waste
For design thin-walled freestanding bathtubs
For bathtubs with drain outlet Ø52 mm
For standard size bathtubs

Features

- The length of the bathtub trap 100 cm
- Overflow flexi pipe
- Reduced installation height
- Easy clean CLICK/CLACK
- Closing waste by CLICK/CLACK
- Bath waste and overflow system
- Wet odour trap with swivel elbow

Scope of supply

- Assembly kit
- Chrome-plated metal grid and overflow cover
- Chrome-plated metal plug
- Chrome-plated brass outlet
- Waste and trap body with overflow
- Profiled seal
- Odour trap of polypropylene, thermally and chemically resistant

Order number, Logistic information

Code	EAN		Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A516CKM-100	8595580561864	100 mm	0,77 9,21 167,4 kg	220×360×75 595×435×395 mm	12 192 pcs

Warranty

2/3 years *

Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 27 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm