


A160UNI

Side inlet fill valve metal thread, universal

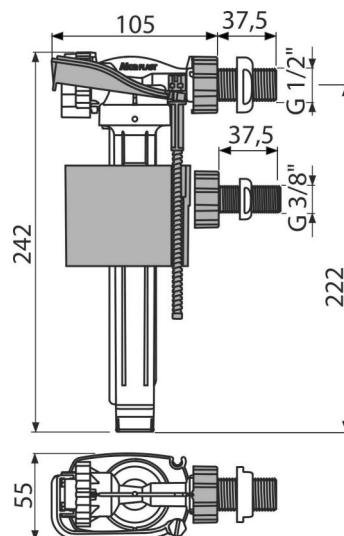

Application

For installation on the side of the cistern
For pre-wall installation systems
For replacement
Universal valve for plastic and ceramic flushing cisterns

Features

- Metal thread length 38 mm
- Low sensitivity to the changing pressure in the water main
- Material: POM
- Adjustable water level
- Smooth closing without any shocks
- Built-in filter to trap dirt

Scope of supply

- Bayonet 1/2" with nut
- Bayonet 3/8" with nut
- Inlet fill valve holder
- Strainer for dirt
- Valve

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A160UNI	8595580570644	0,41 14,77 256,4 kg	235×145×60 590×430×390 mm	36 576 pcs

Warranty

2/6 years *

Norms

EN 14124

Technical specifications

- Acoustic group I <20 dB
- Recommended operating pressure 0,3-0,5 MPa
- Working range 0,05-1,6 MPa
- Thread diameter 1/2 "
- Thread diameter 3/8 "