

# APZ10BLACK-950M Simple

## Shower drain with an edge for perforated grids, black-matt

### Application


For wheelchair access  
For drainage of floor-level showers  
For installation into open spaces or near the wall of the shower area  
For indoor use

### Features

- Color: black
- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

### Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Anchoring set: screw Ø4 – 8 pcs, 2×38, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 10 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

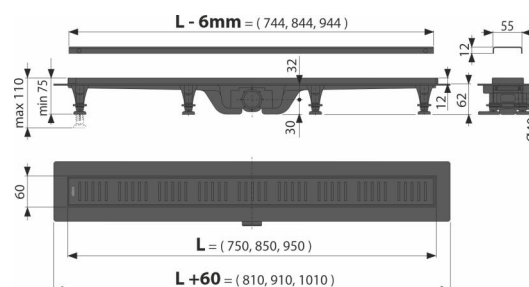

### Order number, Logistic information

| Code            | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|-----------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ10BLACK-950M | 8595580570798 | 950 mm<br>2,21   66,21   218,6 kg    | 1065×80×145   1085×785×415 mm   | 30   90 pcs                    |

### Warranty

2/6 years \*

### Norms

EN 1253

### Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 28 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm