


APV3513

Floor drain 105×105/50 mm side outlet, stainless steel grid, stainless steel flange and collar-2nd level insulation, combined odour trap SMART

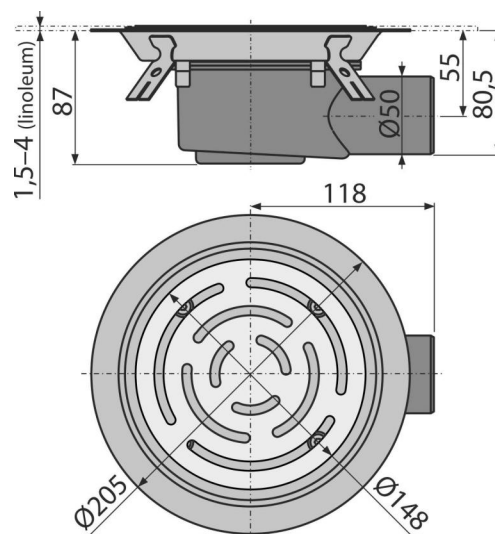

Application

For wheelchair access
For drainage of vinyl floors
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms) – combined odour trap

Features

- Side connection to waste Ø50 mm
- Installation into vinyl floors
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Round grid Ø148 mm
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Wide insulation collar for connection to waterproofing construction
- Odour traps prevent the penetration of odours from the sewer

Scope of supply

- Combined odour trap
- Stainless steel grid
- Stainless steel flange + assembly set
- Seal kit
- Floor drain body Ø50 mm, side outlet

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV3513	8595580573430	1,30 1,30 175,4 kg	250×205×90 250×205×90 mm	1 120 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 87 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 50 mm
- The flow of the inlet grid (wet odour trap) 50 l/min
- Load class K3 300 kg
- Odour trap 15 mm