APV3513

Floor drain 105×105/50 mm side outlet, stainless steel grid, stainless steel flange and collar-2nd level insulation, combined odour trap SMART

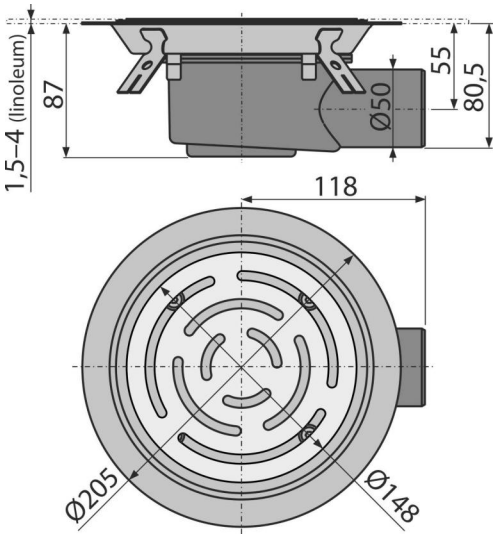

Application

For the interior, where will be frequent use associated with the regular water

runoff into the floor drain (bathrooms) – combined odour trap
For drainage of vinyl floors
For wheelchair access

Features

- Round grid Ø148 mm
- Wide insulation collar for connection to waterproofing construction
- Installation into vinyl floors
- Side connection to waste Ø50 mm
- Odour traps prevent the penetration of odours from the sewer
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Material: stainless steel AISI 304, DIN 1.4301

Scope of supply

- Floor drain body Ø50 mm, side outlet
- Stainless steel grid
- Combined odour trap
- Stainless steel flange + assembly set
- Seal kit

Order number, Logistic information

Code	EAN	Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
APV3513	8595580573430	1,30 | 1,30 | 175,4 kg	250×205×90 | 250×205×90 mm	1 | 120 pcs

Norms

EN 1253

Technical specifications

- The flow of the inlet grid (wet odour trap) 50 l/min
- Resistance of odour trap against the pressure 480 Pa
- Load class K3 300 kg
- Waste pipe diameter 50 mm
- Total installation height 87 mm
- Odour trap 15 mm

© 2026 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com