


AVZ112-R103 Low

Outdoor drain channel 60 mm with plastic frame and welded galvanized grid B125

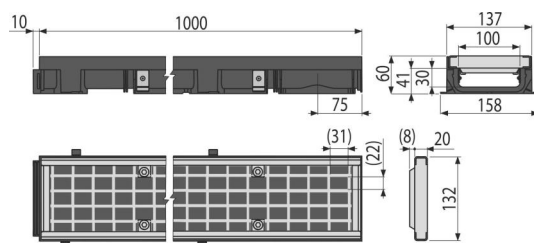

Application

For drainage of areas with occasional passage of cars, sidewalks, pedestrian zones and similar areas for passenger cars

Features

- Grid locking without the use of screws
- The drain can be simply cut in half to form two equal parts
- Material with UV stabilizer against aging, fading and degradation of plastic
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- ☑ Low weight, high solidity
- Galvanized welded grid – fixed to the drain using four stainless steel screws, mesh size 22×31 mm
- Galvanized grid, inlet slot width 9 mm
- Sophisticated and solid locking mechanism for simple connection of the individual drains
- Easy access to the drainage channel – simple cleaning
- Bottom outlet waste connection Ø110 mm
- Lock system allows easy connecting without additional fixing elements

Scope of supply

- Galvanized grid – welded – load class B125
- Drain body with plastic frame

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AVZ112-R103	8595580574918	4,15 4,15 539,0 kg	1010×60×137 1010×60×137 mm	1 125 pcs

Warranty

2/6 years *

Norms

EN 1433

Technical specifications

- Total installation height 60 mm
- Waste pipe diameter 110 mm