


# APZ2012-OPTION9-550 Optimal

Shower drain with an edge for two-sided grid

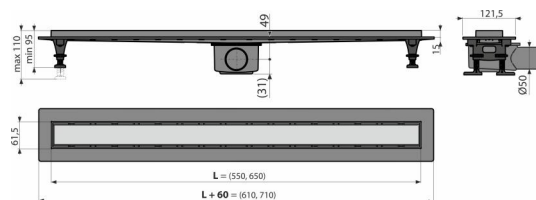

## Application

For wheelchair access  
For drainage of floor-level showers  
For installation into open spaces or near the wall of the shower area  
For indoor use

## Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Installation height from 95 mm
- Wet odour trap with swivel elbow
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

## Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Two-sided grid OPTION
- Self-adhesive waterproofing tape
- Strainer to capture the dirt
- Wet odour trap
- Height adjustable feet
- Linear shower drain

## Order number, Logistic information

| Code                | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|---------------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ2012-OPTION9-550 | 8595580577681 | 1,43   45,82   91,6 kg               | 620x125x150   1175x668x410 mm   | 32   64 pcs                    |

## Warranty

2/6 years \*

## Norms

EN 1253

## Technical specifications

- Total installation height 95-110 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 50 mm
- Flow of the inlet grid 50 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 30 mm