APZ2012-OPTION9-650 Optimal

Plastic linear shower drain, with an edge and two-sided grid (full / for embedding tiles), length 650 mm

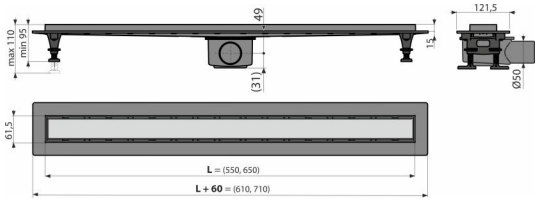

Application

For indoor use
For drainage of floor-level showers
For installation into open spaces or near the wall of the shower area
For wheelchair access

Features

- Installation height from 95 mm
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals
- Secure connection to the construction waterproofing system
- Wet odour trap with swivel elbow
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage

Scope of supply

- Linear shower drain
- Self-adhesive waterproofing tape
- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Wet odour trap
- Height adjustable feet
- Two-sided grid OPTION
- Strainer to capture the dirt

Order number, Logistic information

Code	EAN		Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
APZ2012-OPTION9-650	8595580577698	9 mm	1,71 | 54,70 | 109,4 kg	720×125×150 | 1175×768×410 mm	32 | 64 pcs

Norms

EN 1253

Technical specifications

- Odor trap combined with a water seal 30 mm
- Flow of the inlet grid 50 l/min
- Resistance of odour trap against the pressure 380 Pa
- Waste outlet diameter 50 mm
- Minimum thickness of concrete 80 mm
- Total installation height 95-110 mm
- Load class K3 300 kg

© 2026 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com