


# APS6

Concealed washing machine trap for connecting two appliances, stainless steel DN40 and DN50

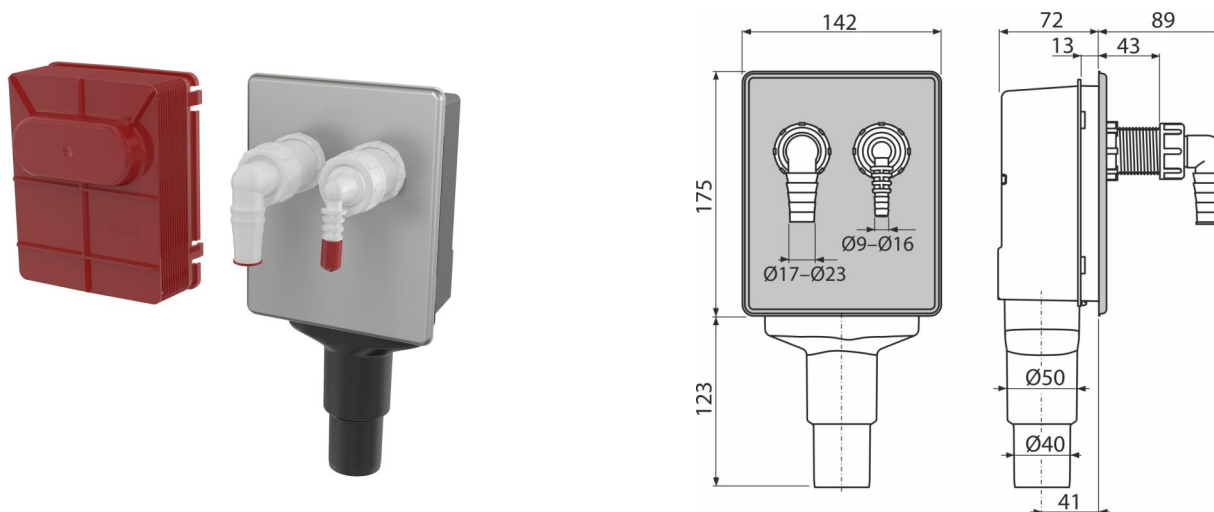

## Application

For installation under plaster  
For connecting two appliances

## Features

- Material: polypropylene
- Connection to HT 40/50
- Service access for easy cleaning

## Scope of supply

- Elbow 17-23 mm - 1 pc, Elbow 8-16 mm 1 pc
- Stainless steel cover
- Construction cap
- Waste and trap body

## Order number, Logistic information

| Code | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APS6 | 8595580578473 | 0,78   14,11   245,7 kg              | 300×165×150   580×380×420 mm    | 18   288 pcs                   |

## Warranty

2/3 years \*

## Norms

EN 274

## Technical specifications

- Flow rate 16,8 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm