


AS-P124

Installation frame for concealed washing machine trap for connection of two appliances

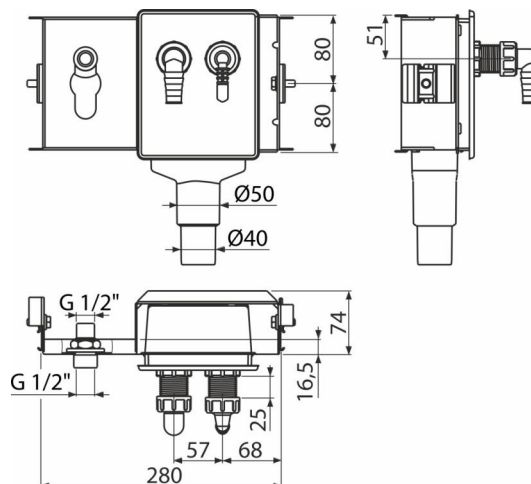

Application

For installation under plaster
For connecting two appliances

Features

- Material: polypropylene, galvanized
- Connection to HT 40/50
- Service access for easy cleaning

Scope of supply

- Elbow 17-23 mm - 1 pc, Elbow 8-16 mm 1 pc
- Stainless steel cover
- Connection fittings G1/2"-G1/2"
- Construction cap
- Waste and trap body

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AS-P124	8595580578541	1,94 1,94 - kg	300x310x150 mm	1 - pc

Warranty

2/3 years *

Norms

EN 274

Technical specifications

- Trap flow rate 16,8
- Heat resistance certificate for the trap body 95 °C
- Odour trap 50 mm