

# APZ12-650 Optimal

Shower drain with an edge for perforated grids or tile embedding

## Application


- For wheelchair access
- For two-sided grid OPTION
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For full grid SOLID
- For indoor use
- For grid TILE for embedding tiles

## Features

- Secure connection to the construction waterproofing system
- Combined odour trap provides protection against odour from the sewage even after the water dries out from the waste
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Installation height from 85 mm
- Adjustable plastic anchor legs 0–25 mm allowing fast and convenient installation, including the precise plane setting
- The high flow rate is achieved due to the double compartment trap system
- High resistance against chemicals

## Scope of supply

- Fixation set: screw Ø4,2×38 – 8 pcs, dowel Ø8 – 4 pcs
- Combined odour trap with an integrated seal
- Self-adhesive waterproofing tape
- Height adjustable feet 2 pcs
- Linear shower drain

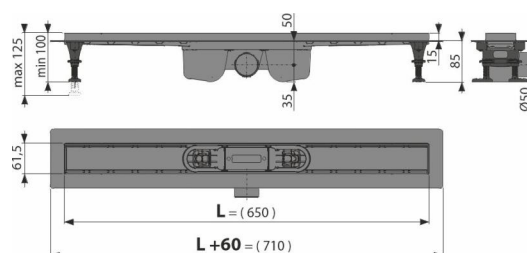

## Order number, Logistic information

| Code      | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|-----------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ12-650 | 8595580583002 | 650 mm<br>1,46   17,47   52,4 kg     | 720×125×150   825×370×700 mm    | 12   36 pcs                    |

## Warranty

2/6 years \*

## Norms

EN 1253

## Technical specifications

- Total installation height 100-125 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 50 mm
- Flow of the inlet grid 63 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 50 mm