

APZ20-950-N-B Simple

Shower drain with a stainless steel edge for two-sided grid, NICKEL-brushed matt

Application


- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use
- For embedding tiles or waterproof wood to the thickness of 8 mm

Features

- Secure connection to the construction waterproofing system
- Combined odour trap provides protection against odour from the sewage even after the water dries out from the waste
- Material: stainless steel with PVD surface finish
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Surface finish: NICKEL-brushed matt
- Grid is included in packaging
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level

Scope of supply

- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Two-sided grid DOUBLE (full grid or grid for embedding tiles)
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

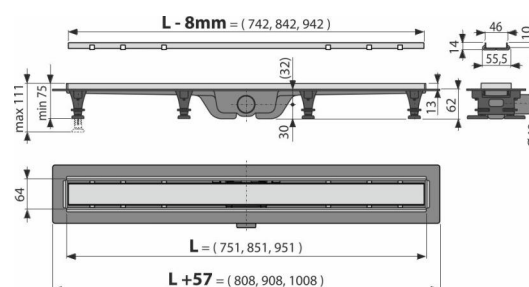

Order number, Logistic information

Code	EAN		Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ20-950-N-B	8595580588908	950 mm	2,64 79,09 257,3 kg	1065×80×145 1080×780×410 mm	30 90 pcs

Warranty

2/6 years *

Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Waste outlet diameter 40 mm
- Flow of the inlet grid 24 l/min
- Odor trap combined with a water seal 25 mm