APZ23-DOUBLE9-750 Fit and Go Wall

Stainless steel linear shower drain, with an edge and fixed vertical flange to the wall, two-sided grid (full / for embedding tiles), length 750 mm

Application

For indoor use
For drainage of floor-level showers
For installation directly to the wall
For wheelchair access

Features

- Stainless steel shower drain (perfectly smooth and durable surface thanks to special surface treatment)
- Gradient of inner part of the shower drain body
- Installation height 81 mm
- Adjustable height
- Self-adhesive tape for quality waterproofing
- Shower drain made from one piece of stainless steel sheet
- The shower drain body is protected by the polystyrene insert
- Design is determined by double-sided grid DOUBLE - from one side it is a full grid made of stainless steel and the other side has an option for embedding tiles or waterproof wood to the thickness of 12 mm
- 25 years guarantee
- Shower drain material: stainless steel 1.5 mm, AISI 304, DIN 1.4301

Scope of supply

- Linear shower drain
- Two-sided grid DOUBLE (full grid or grid for embedding tiles)
- Trap for shower drain APZ-S9
- Combined odour trap SMART
- Adjustable feet 2 pcs
- Self-adhesive waterproofing tape
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Comb for applying glue into the grid frame
- Dismantling hook
- Fixation set for attaching adjustable legs: screw 4.2×38 – 4 pcs, anchor – 4 pcs
- Fixation set: screw Ø4,2×38 – 3 pcs, anchor Ø8 – 3 pcs

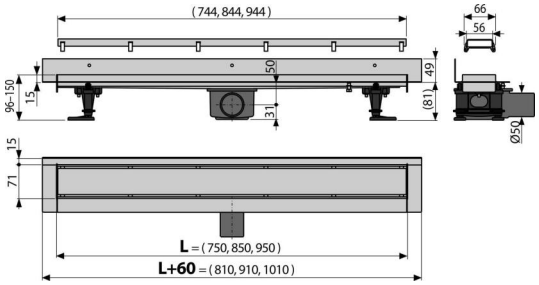

Order number, Logistic information

Code	EAN		Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
APZ23-DOUBLE9-750	8595580566029	9 mm	3,91 | 31,28 | 113,8 kg	820×200×160 | 825×370×820 mm	8 | 24 pcs

Warranty
2/25 years *

Norms
EN 1253

Technical specifications

- Odour trap 30 mm
- Flow rate 50 l/min
- Resistance of odour trap against the pressure 380 Pa
- Waste pipe diameter 50 mm
- Minimum thickness of concrete 81 mm
- Total installation height 96-150 mm
- Load class K3 300 kg

* For more information about warranty visit https://www.alcadrain.com/warranty.

© 2026 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com